


固定螺纹式热电偶 Fixed screw type thermocouple



型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	热响应时间 Thermal response time	保护管材质 Material for protective tube	规格 Specification	
					d	L
WRM-230 WRM ₂ -230	N	0~800	<90s	1Cr18Ni9Ti	φ16	
		0~1100		0Cr25Ni20		
WRM-230G WRM ₂ -230G		0~800	<24s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRN-230 WRN ₂ -230	K	0~800	<90s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRN-230G WRN ₂ -230G		0~800	<24s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		

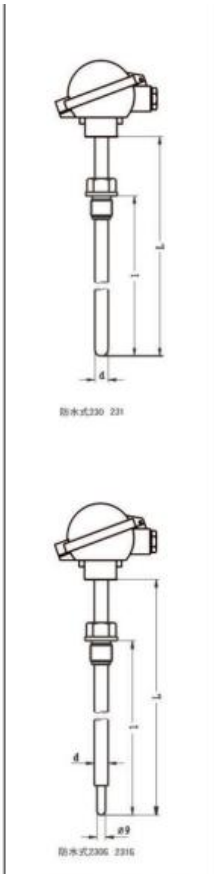

WRE-230 WRE ₂ -230	E	0~800	<90s	1Cr18Ni9Ti	φ20	300×150 350×200 400×250 450×300 500×350 550×400 650×500 900×750 1150×1000 1650×1500 2150×2000
WRE-230G WRE ₂ -230G			<24s			
WRC-230 WRC ₂ -230	T	0~350	<90s	1Cr18Ni9Ti		
WRC-230G WRC ₂ -230G			<24s			
WRF-230 WRF ₂ -230	J	0~600	<90s	1Cr18Ni9Ti		
WRF-230G WRF ₂ -230G			<24s			
WRM-231 WRM ₂ -231	N	0~800	<90s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRM-231G WRM ₂ -231G		0~800	<24s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRN-231 WRN ₂ -231	K	0~800	<120s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRN-231G WRN ₂ -231G		0~800	<24s	1Cr18Ni9Ti		
		0~1100		0Cr25Ni20		
WRE-231 WRE ₂ -231	E	0~800	<120s	1Cr18Ni9Ti		
WRE-231G WRE ₂ -231G			<24s			
WRC-231 WRC ₂ -231	T	0~350	<120s	1Cr18Ni9Ti		
WRC-231G WRC ₂ -231G			<24s			
WRF-231 WRF ₂ -231	J	0~600	<120s	1Cr18Ni9Ti		
WRF-231G WRF ₂ -231G			<24s			

- 1) 型号230、231为防水式，防护等级IP55；型号220、221为防喷式，防护等级IP65，其它参数同230、231；
- 2) 保护管其余材质根据协议订货；
- 3) 公称压力为4MPa。

- 1) Model 230 and 231 are waterproof type type with the protective grade being IP55; Model 120 and 121 are anti-spraying type with the waterproof grade being IP65. the other parameters are the same as model 130 and 131 .
- 2) The material for the rest protective tube is ordered according to the agreement.
- 3) Nominal pressure is 4MPa.

型号示例 No. of example	螺纹规格 Graduation		d
	代号 Code	M	
WRN-230	-	M27×2	Φ16
WRN-230A	A	G3/4	
WRN-231G	-	M27×2	Φ20
WRN-231GA	A	G3/4	

