


插座式热电阻 Thermal resistance of socket type

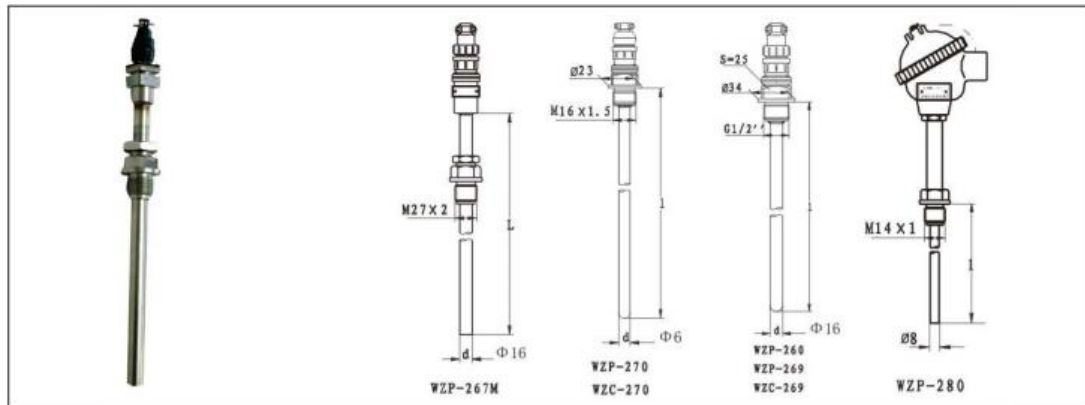

应用

采用接插件形式，安装方便。适用于测量-200~450℃范围内液体、气体及固体表面测温。

Application

The measuring end is pressed against the surface of the measuring object by elastic pressing device. It is suitable for temperature measurement in plastic, textile and food industry.

主要技术参数

精度等级: A,B
防护等级: IP65
公称压力: 常压

Main technical parameters

Precision grade: A,B
Protection level: IP65
Nominal pressure: atmospheric pressure

型号及规格 Model and specifications

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	热响应时间 Thermal response time	保护管材料 Material for protective tube	规格 Specification
WZP-260	Pt100	0~100	<30s	1Cr18Ni9Ti	100,150
WZP ₂ -260			<45s		200,250
WZP-267M	Pt100	-50~150	<30s		300
WZP-269	Pt100	A级 -30-300 B级 -50-500	<30s		75,100
WZP ₂ -269			<45s		150,200
WZC-269	Cu50	-50~100	<120s		250
WZP-270	Pt100	-200~420	<15s		50,75
WZC-270	Cu50	-50~150	45s		100,150
WZP-280	Pt100	-200~300	<30s		200